



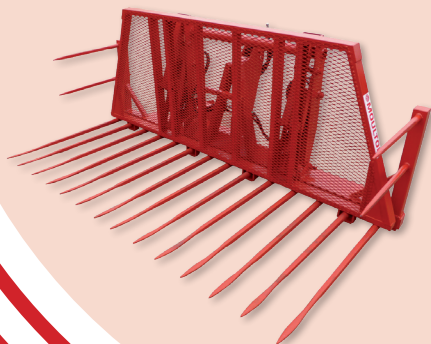

MOULTON
FARM MACHINERY LTD

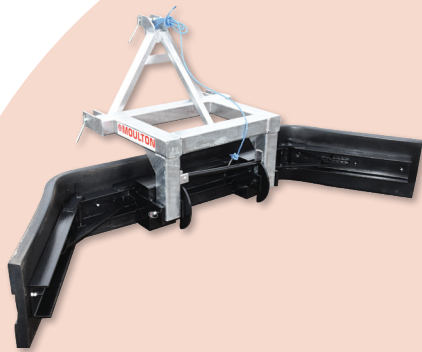

PRODUCT GUIDE


YARD SCRAPERS



YS4-HGP Yard Scraper

DIMENSIONS:
Adjustable working width
from approximately
1.68m to 2.29m.

WEIGHT: 240kg.

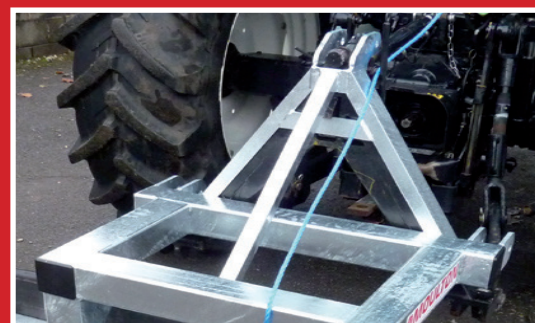

The YS4-HGP Yard Scraper is fitted with a 50mm, moulded rubber blade. The blade is designed to turnover allowing use in both forward and reverse, a travel direction lock is realised by a rope from the tractor seat.

The blade can be reversed to allow use of both sides to prolong the life of the rubber blade when used in one direction more than the other. The blade frame is manufactured from heavy channel section, painted steel, the linkage frame has a built in 'A' Frame and cat 1&2 three point pins, manufactured from heavy duty galvanized box section steel.


YARD SCRAPERS



YS5-HGP Yard Scraper

DIMENSIONS:
Adjustable working width
from approximately
2.0m to 3.0m.

WEIGHT: 280kg.

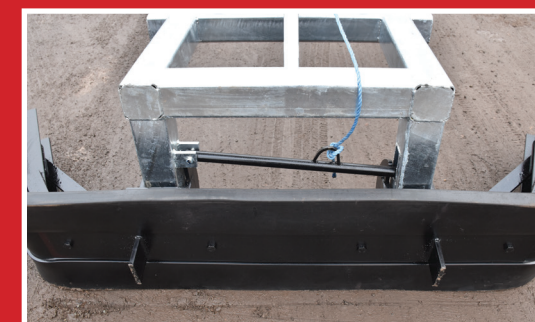

The YS5-HGP Yard Scraper is fitted with a 50mm, moulded rubber blade. A high capacity heavy duty scraper, wider working width longer blade sides than our popular YS4-HGP this together with long blade life and zero maintenance makes YS5-HGP a cost effect alternative to a 'Box' type scraper.

The blade frame is manufactured from heavy channel section, painted steel, the linkage frame has a built in 'A' Frame and cat 1&2 three point pins, manufactured from heavy duty galvanized box section steel.

SILAGE PUSHERS & SKID STEER



SP1 Feed Pusher

DIMENSIONS:

Adjustable working width from 2.2m to 3.5m. Other widths available to order.

WEIGHT: 210kg (multi fit)
240kg (with bracket)

SP1 feed/silage pusher designed for pushing back 'nosed' out feed closer to the feed barrier. The SP1 incorporates twin wheels fitted with used super single lorry tyres.

The Moulton multi-fit system allows the user to use the Silo-Push on any tractor 3 point linkage including 'A' Frame. Also the built in fork truck channels give the option to fit the Silo-Push to any pallet tine equipped loader or handler without further modification.

SP1 can be ordered with welded loader brackets.

Yard Scraper Skid Steer

Using the same frame and blade as YS4HGP or YS5HGP, fitted with Bobcat skid steer brackets, these are fitted flat to allow access and good visibility.



F8 and
F10 grabs
supplied
with welded
brackets

BALE GRAB RANGE



F8HG & F8BB

DIMENSIONS:


Overall length 2m (excluding brackets) width excluding gathering bar 1.6m.

WEIGHT:
F8HG 280kg.
F8BB 350kg.

The F8HG is a very heavy duty flat 8 grab for conventional bales suitable for use on tractor loaders and materials handlers.

The F8BB is a flat 8 sized bale grab of very heavy duty construction, fitted with larger claws. Suitable for handling flat 8 packs of conventional bales or up to 2 high density bales.

Follow us on Social Media -
 Moulton Farm Machinery

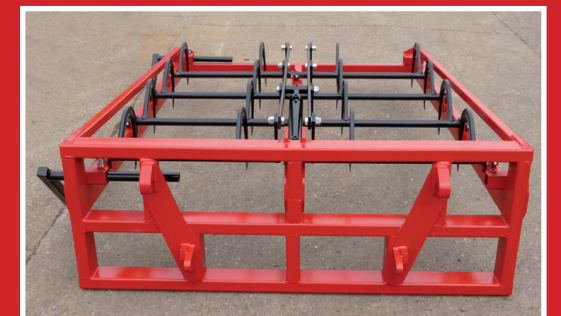

BALE GRAB RANGE

BBG2
grabs supplied
with welded
or bolt on
brackets.



BBG2

DIMENSIONS:
2600mm overall length
(excluding brackets), 2400mm
wide (excluding gathering bar),
800mm high at back.

WEIGHT: 695kg.

F10BB

The F10BB suitable for handling 10 conventional bales (8 bales length wise and 2 across) it will also handle high density bales with full cover length wise.

DIMENSIONS:
Overall length 2.5m (excluding brackets)
width excluding gathering bar 1.6m.


WEIGHT: 350kg



Special purpose grabs to order
Call us on 01530 567040



PUSH OFF BUCK RAKES

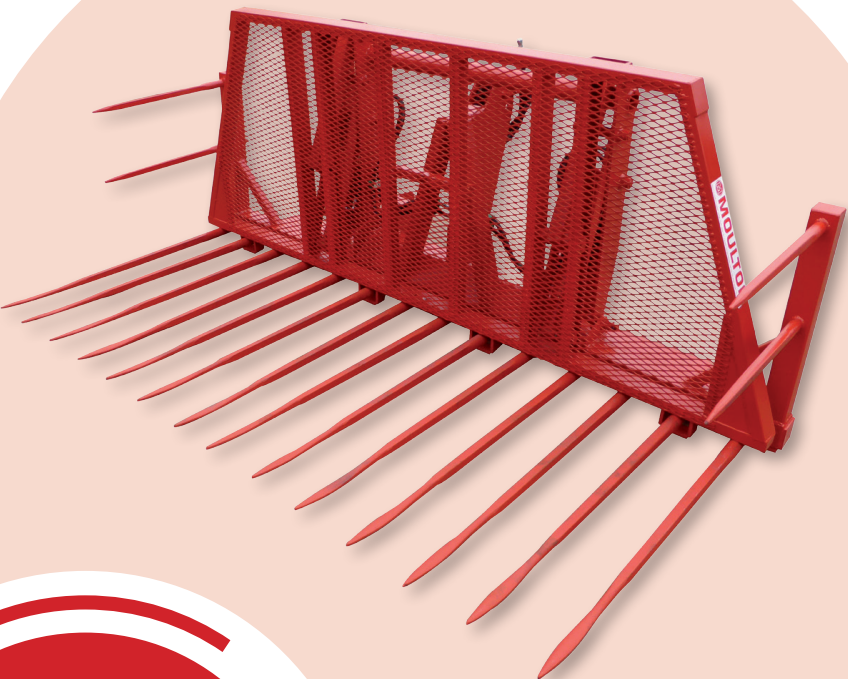


BR1, BR2 & BR3

DIMENSIONS:
BR1 12 Tine
2.4m working width.
BR2 14 Tine
2.8m working width.
BR3 16 Tine
3.2m working width.

Moulton push off Buck Rakes are of heavy duty construction, using twin double acting rams and are fitted with 1.4m conus 2 tines fitted into tapered bushes.

Two side tines each side are fitted as standard. The flat back design makes all models suitable for use on tractor rear or front linkages.

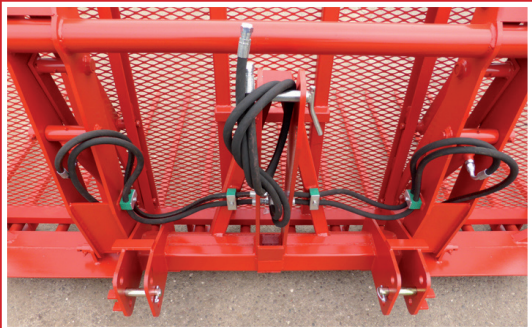

For prices please visit our website

 www.yardscrapers.co.uk



MOULTON
FARM MACHINERY LTD

Telephone: 01530 567040 • Mobile: 07712 773601
Email: info@moultonfm.co.uk • www.yardscrapers.co.uk